


2200N95HV

HI-VIS DISPOSABLE RESPIRATORS

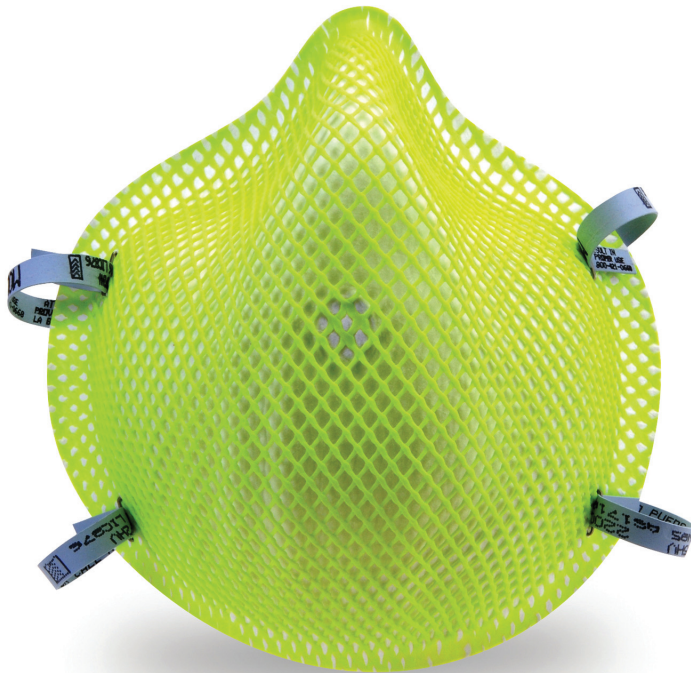

HI-VIS SOLUTION

The Moldex® 2200N95HV Hi-Vis Particulate Respirator makes the supervisor's job easier. The 2200N95HV makes workers stand out in a crowd, so supervisors can make quick and easy compliance checks.

INCREASED WORKER SAFETY

The Hi-Vis respirator also creates a safer working environment for the workers. Whether workers are in a high traffic, low traffic, or no traffic area, the Hi-vis mask will help them get noticed by potential hazards.

DURABLE COST SAVINGS

The Dura-Mesh® on the outside of the respirator protects the filter media and increases the life of the respirator by making the mask more durable. The inner layer of Dura-Mesh® resists collapsing in regular use and even under hot and humid conditions. Any way you look at it, the Dura-Mesh® shell saves you money because workers use fewer masks.

COMFORT IN SAFETY

Several design innovations make the 2200N95HV one of the most comfortable masks on the market. The contour molded nose bridge gives workers a comfortable seal that conforms to the contours of their face. Softspun® inner lining and a soft foam nose cushion take the comfort level up a notch.

APPLICATIONS

Hot, humid and dusty environments such as welding, soldering and brazing, grinding, sanding, sweeping, bagging, stone quarrying, metal machining, cement, underground mining, polishing, buffing, lime, poultry and textiles. No oil present. Note: For areas with oils present, you must use an R or P respirator.


FEATURES

- 100% PVC-Free.
- Easy compliance checks.
- Collapse-resistant Dura-Mesh® shell.
- Contour molded nose bridge comfortably fits the wearer's face.
- No uncomfortable metal noseband to pinch.
- Softspun® inner lining feels soft on the face.
- Soft foam nose cushion eliminates pressure points.
- Proven durability and cost savings.
- Meets heat and flame resistance in accordance with ANSI/ISEA 110-2003 Section 7.11.1.


2200N95HV

HI-VIS DISPOSABLE RESPIRATORS

PART # / DESCRIPTION	SIZE	DISPLAY	Case
7001/2/3 Facepiece	M, L	20 per Box	12 Boxes



Moldex-Metric, Inc.
CULVER CITY, CALIFORNIA, 90232
+1 (800) 421-0668



THESE RESPIRATORS ARE APPROVED ONLY IN THE FOLLOWING CONFIGURATIONS:

TC-	PROTECTION ¹	RESPIRATOR			CAUTIONS AND LIMITATIONS ²
		2200N95-HV	2201N95-HV	2207N95-HV	
84A-4395	N95	X	X	X	A B C J M N O P

1. Protection
N95 Particulate Filter (95% filter efficiency level) effective against particulate aerosols free of oil; time use restrictions may apply

2. Cautions and Limitations
A- Not for use in atmospheres containing less than 19.5 percent oxygen.
B- Not for use in atmospheres immediately dangerous to life or health.
C- Do not exceed maximum use concentrations established by regulatory standards.
J- Failure to properly use and maintain this product could result in injury or death.
M- All approved respirators shall be selected, fitted, used, and maintained in accordance with MSHA, OSHA, and other applicable regulations.
N- Never substitute, modify, add, or omit parts. Use only exact replacement parts in the configurations as specified by the manufacturer.
O- Refer to user's instructions, and/or maintenance manuals for information on use and maintenance of these respirators.
P- NIOSH does not evaluate respirators as surgical masks.

WARNING TO USER

- Follow all instructions and warnings on the use of this respirator and wear during all times of exposure. Failure to do so will reduce respirator effectiveness, wearer protection, and may result in sickness or death.
- Before use, the user must first be trained by the employer in proper respirator use, in accordance with applicable safety and health standards, for the contaminant and exposure level in the assigned work area.
- The particulates and other contaminants which can be dangerous to your health include those which you cannot see, taste, or smell.
- This product has not been sold with warnings or use instructions for personnel involved in healthcare or related situations, where there may be the possibility contact with disease or biological hazards. If you are considering such uses, first call the Moldex Technical Service Dept., +1 (310) 837-6500 ext. 512/550 or +1 (800) 421-0668 ext. 512/550.



MOLDEX-METRIC, INC.
10111 West Jefferson Blvd.
Culver City, CA 90232
TEL: +1 (800) 421-0668 or
+1 (310) 837-6500
FAX: +1 (310) 837-9563
E-mail: sales@moldex.com
www.moldex.com

CANADIAN CUSTOMER SERVICE
Tel: +1 (800) 421-0668, Ext. 517
Fax: +1 (310) 837-9563

USE AGAINST:

- Particulate aerosols free of oil.

DO NOT USE AGAINST:

- Concentrations of contaminants which are unknown, or are immediately dangerous to life or health.
- Concentrations of particulates which exceed the maximum use concentration or 10 times the OSHA Permissible Exposure Limit, whichever is lower.
- Gases, vapors, asbestos, paint spray, sandblasting particulate materials which generate harmful vapors.
- Oil-based mists.

RESTRICTIONS:

- This respirator does not supply oxygen and must not be used in atmospheres containing less than 19.5% oxygen.
- Do not remain in contaminated area if any physical distress occurs, for example breathing difficulty, dizziness or nausea.
- Leave contaminated area and replace respirator if it is damaged, distorted, a proper fit cannot be obtained or breathing becomes difficult.
- Prior to each use, carefully inspect the entire respirator, including filter media and strap/weld attachment area for tears and damage. Staple or strap/weld attachment perforations do not affect respirator performance.
- Do not alter, modify, or abuse this respirator.
- Store unused in box/bag in a clean, dry, non-contaminated area.
- Dispose of facepiece according to your employer's policy and local regulations.
- Dispose no later than thirty days after first use.
- Use respirator before the "use by" expiration date printed on box/bag.
- If used for welding, wear appropriate eye and face protection.

TECHNICAL SERVICE HELP LINE:

For technical assistance, call Moldex Technical Service Department at +1 (310) 837-6500 ext. 512/550 or +1 (800) 421-0668 ext. 512/550.

LIMITED WARRANTY IMPORTANT NOTICE TO PURCHASER:

This limited warranty is made in lieu of the warranties of merchantability fitness for particular purposes and all other warranties, express or implied. There are no other warranties which extend beyond the description on the face hereof. The physical standards and specifications of Moldex will be met by products. Exclusive Remedies: damages for breach of this limited warranty are limited to the replacement of such quantity of Moldex products proved to be defectively manufactured. Except as provided above, Moldex shall be liable or responsible for any loss, damages, or liability, direct, indirect, incidental special or consequential, arising out of a sale, use or misuse, or the inability to use products by the user.

DISTRIBUTED BY:



Printed on Recycled Paper